


# Spezifikation für Freigabe / specification for release

Kunde / customer : \_\_\_\_\_  
 Artikelnummer / part number : **744782022** LF  
 Bezeichnung : **Multilayer-Keramik-SMD-Induktivität WE-MK**  
 description : **Multilayer-Ceramic-SMD-Inductor WE-MK**



DATUM / DATE : 2004-10-11

## A Mechanische Abmessungen / dimensions:

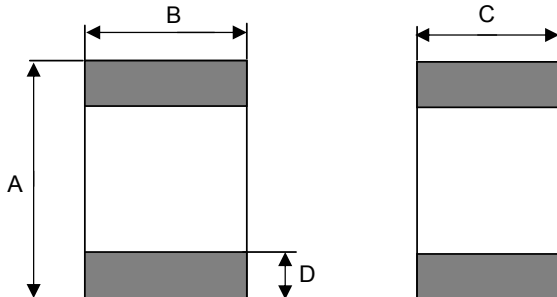


	Größe / size 0201	
A	<b>0,6 ± 0,03</b>	mm
B	<b>0,3 ± 0,03</b>	mm
C	<b>0,3 ± 0,03</b>	mm
D	<b>0,15 ± 0,05</b>	mm
E	<b>0,3 ± 0,05</b>	mm
F	<b>0,3 ± 0,05</b>	mm
G	<b>0,3 ± 0,05</b>	mm

## B Elektrische Eigenschaften / electrical properties:

Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	tol.
Induktivität / inductance	<b>100 MHz</b>	L	<b>2,2</b>	nH	<b>± 0,3nH</b>
Güte Q / Q factor	<b>800 MHz</b>	Q	<b>18</b>		<b>Typ.</b>
DC-Widerstand / DC-resistance		R <sub>DC</sub>	<b>0,26</b>	Ω	<b>max.</b>
Nennstrom / rated current	<b>ΔT = 20 K</b>	I <sub>DC</sub>	<b>300</b>	mA	<b>max.</b>
Eigenres.-Frequenz / self-res.-frequency		SRF	<b>9500</b>	MHz	<b>typ.</b>

## C Lötpad / soldering spec.:



## D Prüfgeräte / test equipment:

**HP 4291 B** für/for L und/and Q  
**HP 4338 B** für/for R<sub>DC</sub>  
**HP 4284 A** für/for I<sub>DC</sub>  
**HP 8722 D** für/for SRF

## E Testbedingungen / test conditions:

Luftfeuchtigkeit / humidity: 33%  
 Umgebungstemperatur / temperature: +20°C

## F Werkstoffe & Zulassungen / material & approvals:

Basismaterial / base material: Keramik / ceramic  
 Kontaktmaterial / contact plating: Ag/ Ni/ Sn

## G Eigenschaften / general specifications:

Umgebungstemp. / ambient temperature: -40°C ~ + 100°C  
 Betriebstemp. / operating temperature: -40°C ~ + 120°C  
 Lagerbedingungen / storage conditions: -10°C ~ + 40°C  
 30 ~ 70% RH

Freigabe erteilt / general release:	<b>Kunde / customer</b>		
Datum / date	<b>Unterschrift / signature</b>		
	<b>Würth Elektronik</b>		
Geprüft / checked	<b>Kontrolliert / approved</b>	AWe	Version 1 04-10-11
		Name	Änderung / modification Datum / date

This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before use. It is essential to give consideration when to install a protective circuit at the design stage.

## Würth Elektronik eiSos GmbH & Co.KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400  
<http://www.we-online.com>